



TYPICAL SECTION  
NOT TO SCALE

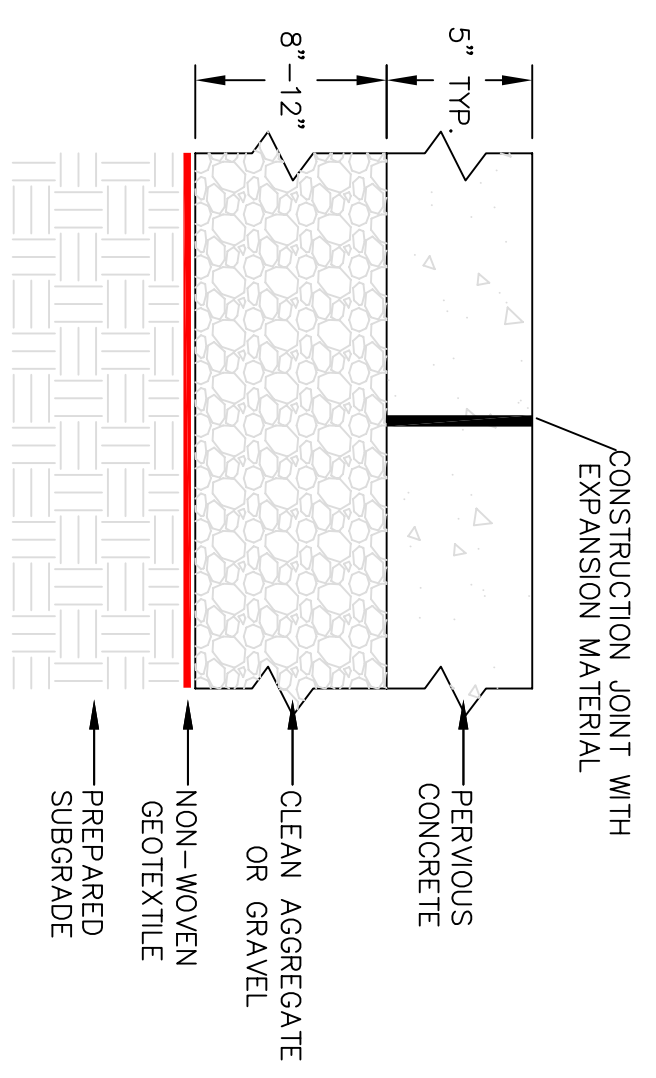

PERVIOUS CONSTRUCTION JOINT  
NOT TO SCALE

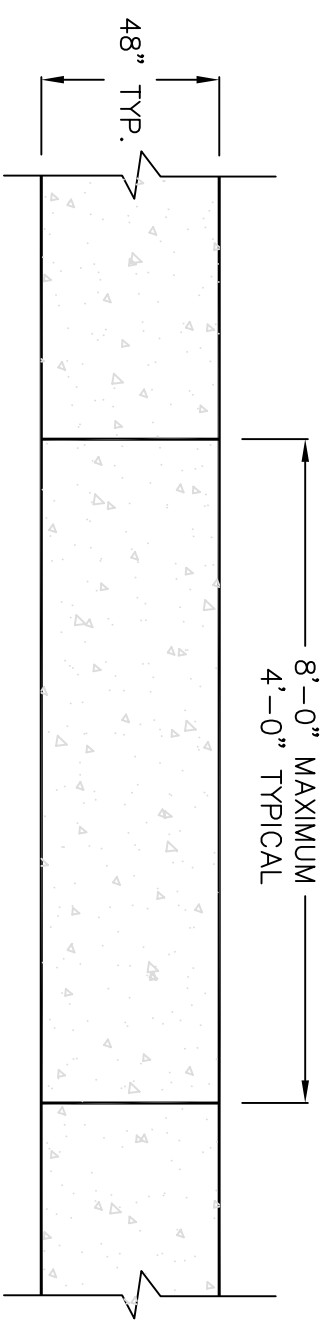

JOINT SPACING - PLAN VIEW  
NOT TO SCALE



INSTALLATION



JOINT CUTTING



CURING

- NOTES:
1. PERVIOUS CONCRETE MUST BE SUPPLIED AND INSTALLED BY NRMCA CERTIFIED PRODUCERS AND CONTRACTORS.
  2. JOINTS TO BE CUT IN FRESH PAVEMENT WITH A PERVIOUS CONCRETE JOINT CUTTING TOOL ONLY.
  3. PERVIOUS CONCRETE MUST BE COVERED WITH 6 MIL PLASTIC, SECURELY FASTENED, FOR SEVEN (7) DAYS.
  4. EXPANSION JOINTS TO BE PLACED EVERY 20 FEET AND AT EACH DRIVEWAY CUT AS PER THE DETAIL AND SPECIFICATIONS.

"The information contained herein is provided for use by PROFESSIONAL PERSONNEL who are competent to evaluate the significance and limitations of the information provided and who will accept total responsibility for the application of this information. The Northeast Cement Shippers Association makes no representations or warranties concerning the fitness of this information for any particular application or installation and DISCLAIMS any and all RESPONSIBILITY and LIABILITY for the accuracy of and the application of the information provided to the full extent of the law."

TYPICAL TOWNSHIP SIDEWALK DETAILS  
SLOPE LESS THAN THAN 1% SHEET 1 OF 3